MOLE PRO

“An Affordable Quality Lighting Solution”

50W LED Panel

Type MP50PDT Variable-Color

KIT available on Pg. 3

"An Affordable Quality Lighting Solution"

Specifications

Head: Type MP50PDT Variable (3200K-5600K)

Includes: 4-Way Barn Door, Power Supply, Power Cable (14ft/4m), G-Mount Battery Adapter.

Rating: 15V DC, 100-240V AC, 50W

Light Source: (1,296) High output 50 watt Mole-Richardson LED's, 3200-5600K 95CRI

Dimming: Flicker Free, Direct DC Dimming
Local Dimmer 100% - 0% (Minimal Color Shift)
DMX Dimmer 100% - 0% (Minimal Color Shift)

Control: DMX512-A In and Out auto-detect. Local mode when DMX signal off

Diffusers: Two standard. Includes light and heavy diffusion

Beam Angle: 140

Cooling: Passive Air

Construction: Aluminum and Plastic

Yoke: Aluminum w/Standard 5/8 in (16mm) Receiver

Compliance: RoHS. CE

IP Rating: 30

Finish: Black

Size: 13.5 in/340mm(d) x 14.5 in/370mm(w) x 4.75 in/125mm(h)

Head Weight: 6lbs/2.72kg

LED Display: 0-100% Intensity
1-512 DMX Channels

Battery Source: V-Mount Battery Adapter

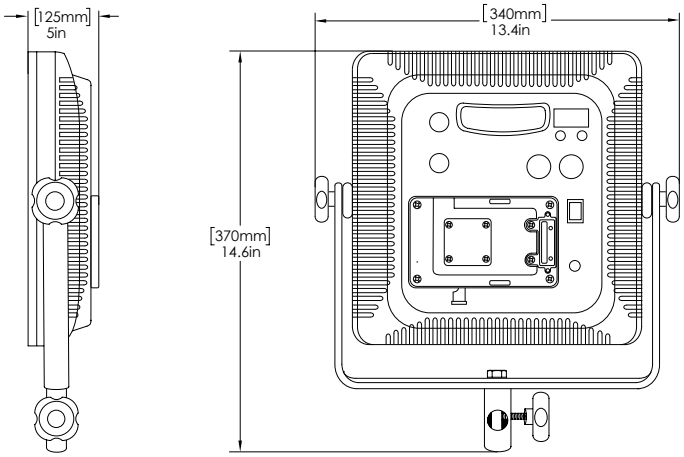

Accessories	Item Number
G-Mount Battery Adapter (Included)	MP50EBAG
Softbox	MP50SB

Performance Data

Using (1,296) 50 Watt high output Mole-Richardson

Distance Feet (Meters)	Light Intensity Maximum **Flood** Foot Candles (Lux) Daylite (5600K)	Light Intensity Maximum **Flood** Foot Candles (Lux) Tungsten (3200K Filter)
10 (3)	62 (664)	59 (636)

MP50EBAG
G-Mount Battery Adapter
(Included)

MP50SB
Softbox

12154 Montague Street, Pacoima, California 91331 U.S.A.
Tel. +1-323-851-0111 • Fax. +1-323-851-5593 • info@mole.com • mole.com
© 2019 Mole-Richardson Co.

Mole-Richardson Co.

MOLE PRO
"An Affordable Quality Lighting Solution"

100W LED Fresnel

Type MP100FDTF Daylite

KIT available on Pg. 3

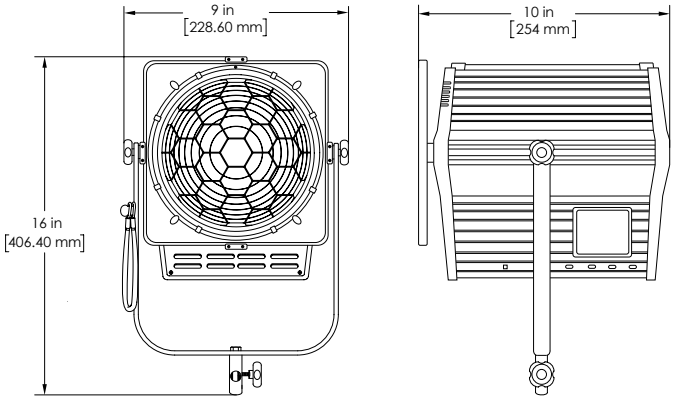

Specifications

Head: Type MP100FDTF Daylite (5600K)

Includes: 4-Way Barn Door, Power Supply, Power Cable (14ft/4m), DMX Cable (10ft/3m), Tungsten (3200K) Filter

Rating: 24V DC, 100-240V AC, 100W

Light Source: (1) 100 Watt high output Mole-Richardson LED. 5600K 95CRI Daylite

Dimming: Flicker Free, Direct DC Dimming
Local Dimmer 100% - 0% (Minimal Color Shift)
DMX Dimmer 100% - 0% (Minimal Color Shift)

Control: DMX512-A In and Out. Manual DMX Address Selector

Condenser: 5 in (125mm) Borosilicate Glass Fresnel

Beam Angle: 10° to 65°

Focusing: Rotating Knob on Back

Cooling: Passive-Forced Air

Construction: Aluminum and Plastic

Yoke: Aluminum w/Standard 5/8 in (16mm) Receiver

Compliance: RoHS. CE

IP Rating: 30

Finish: Black

Size: 10 in/254mm(d) x 9 in/229mm(w) x 16 in/406mm(h)

Head Weight: 6lbs/2.72kg

LED Display: 0-100% Intensity
1-512 DMX Channels

Accessories	Item Number
V-Mount Battery Adapter	MP100EBAV

Performance Data

Using (1) 100 Watt high output Mole-Richardson LED.

Distance Feet (Meters)	Light Intensity Maximum **Flood** Foot Candles (Lux) Daylite (5600K)	Light Intensity Maximum **Flood** Foot Candles (Lux) Tungsten (3200K Filter)	Light Intensity Maximum **Spot** Foot Candles (Lux) Daylite (5600K)	Light Intensity Maximum **Spot** Foot Candles (Lux) Tungsten (3200K Filter)
10 (3)	60 (642)	45 (482)	465 (4,976)	350 (3,745)
5 (1.5)	180 (1,926)	120 (1,284)	1400 (14,980)	900 (9,630)

MP100EBAV
V-Mount Battery Adapter

Mole-Richardson Co.
12154 Montague Street, Pacoima, California 91331 U.S.A.
Tel. +1-323-851-0111 • Fax. +1-323-851-5593 • info@mole.com •mole.com
© 2019 Mole-Richardson Co.

MolePro Kits

"An Affordable Quality Lighting Solution"

LED Panel Kit - Type MP150KITPPP

Includes:

- (3) 50W Mole Pro Panel LED
- (3) Diffusion Panel
- (3) G-Mount Battery Adapter
- (3) AC to DC Powersupply
- (3) Power Cable
- (3) Mole Pro Stands
- (1) Mole Pro Kit Case

Weight: 46lbs (20.86kg)
Size: 24in (w) x 15in (d) 38.5in (h)

LED Panel/Fresnel Kit - Type MP200KITFPP

Includes:

- (2) 50W Mole Pro Panel LED
- (2) Diffusion Panel
- (2) G-Mount Battery Adapter
- (1) 100W Mole Pro Fresnel LED
- (3) AC to DC Powersupply
- (3) Power Cable
- (3) Mole Pro Stands
- (1) Mole Pro Kit Case

Weight: 47lbs (21.31kg)
Size: 24in (w) x 15in (d) 38.5in (h)

LED Fresnel/Panel Kit - Type MP250KITFFP

Includes:

- (2) 100W Mole Pro Fresnel LED
- (1) 50W Mole Pro Panel LEDs
- (1) Diffusion Panel
- (1) G-Mount Battery Adapter
- (3) AC to DC Powersupply
- (3) Power Cable
- (3) Mole Pro Stands
- (1) Mole Pro Kit Case

Weight: 48lbs (21.77kg)
Size: 24in (w) x 15in (d) 38.5in (h)

12154 Montague Street, Pacoima, California 91331 U.S.A.
Tel. +1-323-851-0111 • Fax. +1-323-851-5593 • info@mole.com •mole.com

© 2019 Mole-Richardson Co.

Mole-Richardson Co.